


EQUIPMENT GROUND (PER NEC)
#10 AWG GREEN WIRE

480V / 3PH / 60HZ
Power Supply Provided
By Customer

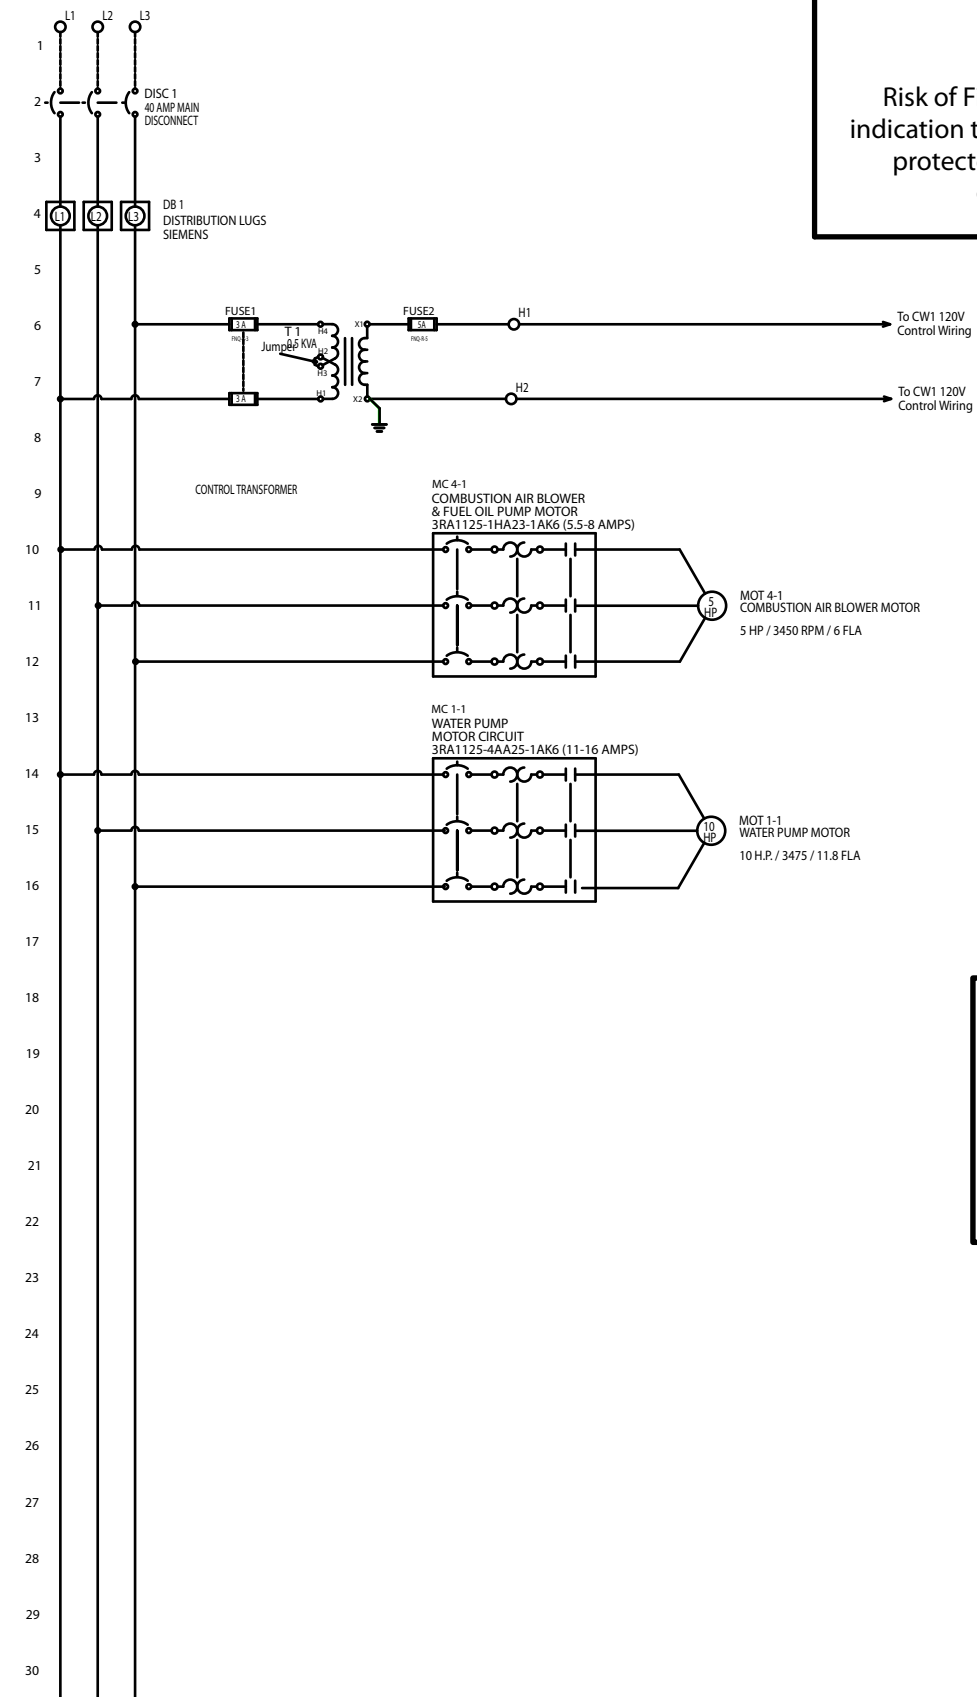

Place Label Inside Of Enclosure Door

Short circuit current:
25kA rms symmetrical, 480V maximum

WARNING

Risk of Fire or Electric Shock - The opening of the branch-circuit protective device may be an indication that a fault current has been interrupted. All current-carrying parts and other components protected by this device should be examined and replaced if damaged. If burnout of a current element of an overload relay occurs, the complete overload relay must be replaced.

The electrical components identified on this drawing will vary according to the heater model. However, the wiring connections remain the same.

PHONE (423) 821-5200 FAX (423) 821-7673 PO BOX 7760 CHATTANOOGA, TN 37407		CUSTOMER:	
HEATEC Inc. an Aetna company		DRAWING NAME: Water Heater, Model HHW-60 480V Power Wiring POWER FLAME C3 BURNER	
THIS DRAWING AND THE DESIGN SHOWN THEREIN IS THE PROPERTY OF HEATEC, INC. AND THE USE OF COPIES THEREOF CANNOT BE MADE WITHOUT WRITTEN CONSENT.		DATE: BLW 03/11/09	
DWG DATE: BLW 03/11/09		APPR. DATE:	
DWG PART NO. 4001905		JOB# HXX-XXX	
NO# XX-XXX-131-531		DESCRIPTION:	
DATE:		DATE:	
CHD. APPR. BY:		CHD. APPR. BY:	